

TERMINAL blocks




Terminal blocks suited to a wide variety of applications.

The stocked K1M range of 6 stud terminals have M4 to M16 terminal stud threads with voltage ratings from 440 to 2000 volts depending upon the type.

The KS range of terminal boards are for hazardous duty (EX locations). These are PTB certified to 750 volts and are suitable for motor lead sizes from 2.5mm² to 25mm².

K1M 6 Pole Type

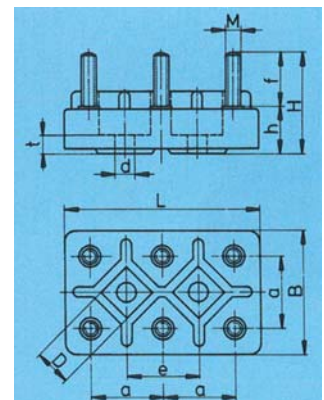


Type number	Stock code	L	B	M	H	h	f	a	e	Ø D	Ø d	t	Terminal designation
K1M4	CK1M4	54	34	4	28	13	15	20	20	10	5.5	5	W2 U2 V2 U1 V1 W1
K1M5	CK1M5	64	40	5	32	13	19	23	23	10	5.5	5	W2 U2 V2 U1 V1 W1
K1M6	CK1M6	78	48	6	40	16	24	28	28	11	6.6	6	W2 U2 V2 U1 V1 W1
K1M8	CK1M8	96	60	8	46	18	28	35	35	15	9	8	W2 U2 V2 U1 V1 W1
K1M10	CK1M10	120	75	10	56	22	34	45	45	18	11	10	W2 U2 V2 U1 V1 W1
KM12	CK12/804	150	95	12	65.5	25.5	40	55	55	18.8	11.5	17.5	W2 U2 V2 U1 V1 W1
KM16	CKM16	160	100	16	93	28	65	60	60	20	14	18	W2 U2 V2 U1 V1 W1




TERMINAL blocks

KL 6 Pole Type



Type number	Stock code	L	B	M	H	h	f	a	e	∅ D	∅ d	t	Max Volts	Load Amps	Terminal designation
KL0K	CKL0K	40	25	3	20.5	10.5	10	15	15	8.2	4.5	7	125	10	W2 U2 V2 U1 V1 W1
KL0K/7	CKL0K/7	40	25	4	22.5	10.5	10	15	15	8.2	4.5	7	125	16	W2 U2 V2 U1 V1 W1
KL31	CKL31	44	28	4	22	10	12	15	15	8.5	4.5	5.5	250	16	W2 U2 V2 U1 V1 W1
KL1K	CKL1K	50	32	4	22.5	11	12	18	18	8.5	4.5	5.5	380	16	W2 U2 V2 U1 V1 W1
KL2K	CKL2K	56	36	5	26.5	11.5	15	20	20	9.5	5.5	7	380	25	W2 U2 V2 U1 V1 W1
KL3K	CKL3KA	70	45	6	31	14	17	25	25	11	7	8.5	750	40	W2 U2 V2 U1 V1 W1

KS 6 Pole (EX) hazardous location Type



Type number	Stock code	L	B	M	H	h	f	f1	a	e	d	∅ d	t	Terminal designation
KS7A	CKS7A/CV	60	37	S7X0.8	38	15	20	13	23	20	10	5.5	8	W2 U2 V2 U1 V1 W1
KS8A	CKS8	64	40	S8X1	42	16	26	15	24	23	10	5.5	10	W2 U2 V2 U1 V1 W1
KS10A	CKS10	78	48	S10X1	45	17	28	18	28	28	11	6.6	12	W2 U2 V2 U1 V1 W1
KS14A	CKS14	96	60	S14X1.25	57	24	33	26	35	35	15	9	15	W2 U2 V2 U1 V1 W1
KS18A	CKS18	120	75	S18X1.5	73	30	43	34	45	45	18	11	19	W2 U2 V2 U1 V1 W1

